

Mathematics II

Marcos Bujosa

Universidad Complutense de Madrid

04/04/2024

1 / 37

1 Highlights of Lesson 1

Highlights of Lesson 1

- Vector and matrix operations
 - Addition and scalar multiplication
 - Some properties of these operations

2 / 37

You can find the last version of these course materials at

<https://github.com/mbujosab/MatematicasII/tree/main/Eng>

– Marcos Bujosa. Copyright © 2008–2024

Algunos derechos reservados. Esta obra está bajo una licencia de Creative Commons Reconocimiento-CompartirIgual 4.0 Internacional. Para ver una copia de esta licencia, visite <http://creativecommons.org/licenses/by-sa/4.0/> o envíe una carta a Creative Commons, 559 Nathan Abbott Way, Stanford, California 94305, USA.

1 / 37

2 Vectors in \mathbb{R}^n

Vector in \mathbb{R}^n is an ordered list of n real numbers

Example

$v \in \mathbb{R}^3$: first component: 5, the second: 1 and the third: 10

$$v = \begin{cases} v_1 = 5 \\ v_2 = 1 \\ v_3 = 10 \end{cases} ; \quad v = (5, 1, 10) = \begin{pmatrix} 5 \\ 1 \\ 10 \end{pmatrix}.$$

Notation

- $a, x, \mathbf{0}$
- $\text{elem}_3(v) \equiv {}_3|v \equiv v|_3 \equiv v_3 = 10$

A parenthesis around a list of numbers denotes a vector.

3 / 37

3 Basic operations with vectors

Vector addition: $(\mathbf{a} + \mathbf{b})_{|i} = \mathbf{a}_{|i} + \mathbf{b}_{|i}$

$$\mathbf{a} = \begin{pmatrix} a_1 \\ a_2 \end{pmatrix} \text{ and } \mathbf{b} = \begin{pmatrix} b_1 \\ b_2 \end{pmatrix} \text{ add to } \mathbf{a} + \mathbf{b} = \begin{pmatrix} a_1 + b_1 \\ a_2 + b_2 \end{pmatrix}.$$

Scalar multiplication: $(\lambda \mathbf{a})_{|i} = \lambda(\mathbf{a}_{|i})$

$$2\mathbf{a} = \begin{pmatrix} 2a_1 \\ 2a_2 \end{pmatrix} \text{ and } (-1)\mathbf{a} = \begin{pmatrix} -a_1 \\ -a_2 \end{pmatrix} \equiv -\mathbf{a}$$


(Hence, the operator “ $|i$ ” is linear)

\mathbf{a} and \mathbf{b} (with n components) are equal when:

$$\mathbf{a}_{|i} = \mathbf{b}_{|i}, \quad i = 1 : n.$$


4 / 37

4 Vector addition

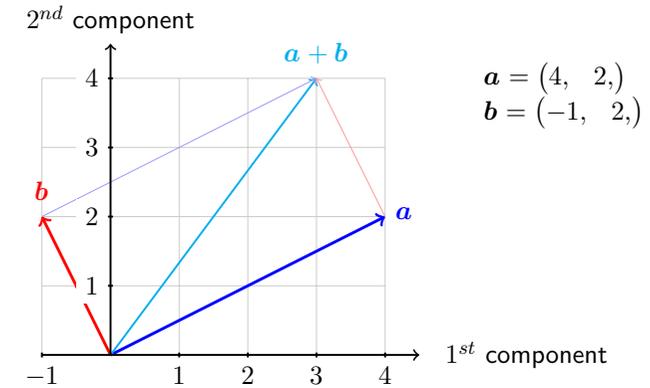

5 / 37

5 Scalar multiplication

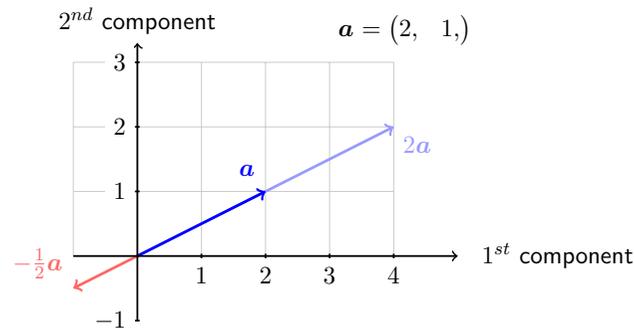

What is the picture of all multiples of \mathbf{a} ?

Is $\mathbf{0}$ a multiple of \mathbf{a} ?

6 / 37

6 Addition and scalar multiplication

$$(\mathbf{a} + \mathbf{b})_{|i} = \mathbf{a}_{|i} + \mathbf{b}_{|i}$$

$$(\lambda \mathbf{a})_{|i} = \lambda(\mathbf{a}_{|i})$$

Let us recall some properties of scalars

Scalars

- $\mathbf{a} + \mathbf{b} = \mathbf{b} + \mathbf{a}$
- $\mathbf{a} + (\mathbf{b} + \mathbf{c}) = (\mathbf{a} + \mathbf{b}) + \mathbf{c}$
- $\mathbf{a} + \mathbf{0} = \mathbf{a}$
- $\mathbf{a} + (-\mathbf{a}) = \mathbf{0}$
- $\mathbf{a}\mathbf{b} = \mathbf{b}\mathbf{a}$
- $\mathbf{a}(\mathbf{b} + \mathbf{c}) = \mathbf{a}\mathbf{b} + \mathbf{a}\mathbf{c}$
- $\mathbf{a}(\mathbf{b}\mathbf{c}) = (\mathbf{a}\mathbf{b})\mathbf{c}$
- $1\mathbf{a} = \mathbf{a}$

Vectors

- $\mathbf{a} + \mathbf{b} = \mathbf{b} + \mathbf{a}$
- $\mathbf{a} + (\mathbf{b} + \mathbf{c}) = (\mathbf{a} + \mathbf{b}) + \mathbf{c}$
- $\mathbf{a} + \mathbf{0} = \mathbf{a}$
- $\mathbf{a} + (-\mathbf{a}) = \mathbf{0}$
- $\lambda(\mathbf{a} + \mathbf{b}) = \lambda\mathbf{a} + \lambda\mathbf{b}$
- $(\lambda + \eta)\mathbf{a} = \lambda\mathbf{a} + \eta\mathbf{a}$
- $\lambda(\eta\mathbf{a}) = (\lambda\eta)\mathbf{a}$
- $1\mathbf{a} = \mathbf{a}$

7 / 37

7 Matrices

Matrix in $\mathbb{R}^{m \times n}$ is an ordered list of n vectors in \mathbb{R}^m

Example

Three vectors in \mathbb{R}^2 : $\mathbf{a} = \begin{pmatrix} 4 \\ 2 \end{pmatrix}$, $\mathbf{b} = \begin{pmatrix} -1 \\ 2 \end{pmatrix}$ and $\mathbf{c} = \begin{pmatrix} 0 \\ 7 \end{pmatrix}$

$$\mathbf{A} = [\mathbf{a}; \mathbf{b}; \mathbf{c}] = \begin{bmatrix} 4 & -1 & 0 \\ 2 & 2 & 7 \end{bmatrix} \neq [\mathbf{c}; \mathbf{b}; \mathbf{a}]$$

Two vectors in \mathbb{R}^3 : $\mathbf{x} = (4, -1, 0)$ and $\mathbf{y} = (2, 2, 7)$

$$\mathbf{B} = [\mathbf{x}; \mathbf{y}]$$

Notation

- $\mathbf{A}, \mathbf{B}, \mathbf{0}$
- $\mathbf{A}, \mathbf{B};$ $\mathbf{A} \neq \mathbf{B}$
 $\begin{matrix} 2 \times 3 & 3 \times 2 & & 2 \times 3 & 3 \times 2 \end{matrix}$

A bracket around a vector list denotes a matrix.

8 More notation

$$\mathbf{A} = \begin{bmatrix} 1 & 2 & 1 \\ 7 & 0 & 3 \end{bmatrix}$$

Picking operators

- $\text{elem}_{21}(\mathbf{A}) = {}_2|\mathbf{A}|_1 = a_{21} : 7$
- $\text{row}_1(\mathbf{A}) = {}_1|\mathbf{A} : (1, 2, 1) = \begin{pmatrix} 1 \\ 2 \\ 1 \end{pmatrix}$
- $\text{col}_1(\mathbf{A}) = \mathbf{A}|_1 : \begin{pmatrix} 1 \\ 7 \end{pmatrix} = (1, 7)$

9 Basic operations with matrices

Matrix addition: $(\mathbf{A} + \mathbf{B})|_j = \mathbf{A}|_j + \mathbf{B}|_j$

$$\mathbf{A} = \begin{bmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{bmatrix} \text{ and } \mathbf{B} = \begin{bmatrix} b_{11} & b_{12} \\ b_{21} & b_{22} \end{bmatrix} \text{ add to } \begin{bmatrix} a_{11} + b_{11} & a_{12} + b_{12} \\ a_{21} + b_{21} & a_{22} + b_{22} \end{bmatrix}$$

Scalar multiplication: $(\lambda \mathbf{A})|_j = \lambda(\mathbf{A}|_j)$

$$7\mathbf{A} = \begin{bmatrix} 7a_{11} & 7a_{12} \\ 7a_{21} & 7a_{22} \end{bmatrix} \text{ and } (-1)\mathbf{A} = \begin{bmatrix} -a_{11} & -a_{12} \\ -a_{21} & -a_{22} \end{bmatrix} = -\mathbf{A}.$$

(Hence, the operator “ $|j$ ” is linear)

\mathbf{A} and \mathbf{B} (with same order) are equal when: $\mathbf{A}|_j = \mathbf{B}|_j$

10 Addition and scalar multiplication

$$(\mathbf{A} + \mathbf{B})|_j = \mathbf{A}|_j + \mathbf{B}|_j;$$

$$(\lambda \mathbf{A})|_j = \lambda(\mathbf{A}|_j)$$

Vectors

1. $\mathbf{a} + \mathbf{b} = \mathbf{b} + \mathbf{a}$
2. $\mathbf{a} + (\mathbf{b} + \mathbf{c}) = (\mathbf{a} + \mathbf{b}) + \mathbf{c}$
3. $\mathbf{0} + \mathbf{a} = \mathbf{a}$
4. $\mathbf{a} + (-\mathbf{a}) = \mathbf{0}$
5. $\lambda(\mathbf{a} + \mathbf{b}) = \lambda\mathbf{a} + \lambda\mathbf{b}$
6. $(\lambda + \eta)\mathbf{a} = \lambda\mathbf{a} + \eta\mathbf{a}$
7. $\lambda(\eta\mathbf{a}) = (\lambda\eta)\mathbf{a}$
8. $1\mathbf{a} = \mathbf{a}$

Matrices

1. $\mathbf{A} + \mathbf{B} = \mathbf{B} + \mathbf{A}$
2. $\mathbf{A} + (\mathbf{B} + \mathbf{C}) = (\mathbf{A} + \mathbf{B}) + \mathbf{C}$
3. $\mathbf{0} + \mathbf{A} = \mathbf{A}$
4. $\mathbf{A} + (-\mathbf{A}) = \mathbf{0}$
5. $\lambda(\mathbf{A} + \mathbf{B}) = \lambda\mathbf{A} + \lambda\mathbf{B}$
6. $(\lambda + \eta)\mathbf{A} = \lambda\mathbf{A} + \eta\mathbf{A}$
7. $\lambda(\eta\mathbf{A}) = (\lambda\eta)\mathbf{A}$
8. $1\mathbf{A} = \mathbf{A}$

11 Rewriting Rules

Distributive rules

$$\begin{aligned} (\mathbf{a} + \mathbf{b})_{|i} &= \mathbf{a}_{|i} + \mathbf{b}_{|i} & {}_i(\mathbf{a} + \mathbf{b}) &= {}_i\mathbf{a} + {}_i\mathbf{b} \\ (\mathbf{A} + \mathbf{B})_{|j} &= \mathbf{A}_{|j} + \mathbf{B}_{|j} & {}_i(\mathbf{A} + \mathbf{B}) &= {}_i\mathbf{A} + {}_i\mathbf{B} \end{aligned}$$

In addition, if we allow $\lambda\mathbf{a} = \mathbf{a}\lambda$ and $\lambda\mathbf{A} = \mathbf{A}\lambda$, then we get

Associative rules (moving parentheses)

$$\begin{aligned} (\lambda\mathbf{b})_{|i} &= \lambda(\mathbf{b}_{|i}) & {}_i(\mathbf{b}\lambda) &= ({}_i\mathbf{b})\lambda \\ (\lambda\mathbf{A})_{|j} &= \lambda(\mathbf{A}_{|j}) & {}_i(\mathbf{A}\lambda) &= ({}_i\mathbf{A})\lambda \end{aligned}$$

Scalar and operator interchange

$$\begin{aligned} (\mathbf{b}\lambda)_{|i} &= (\mathbf{b}_{|i})\lambda & {}_i(\lambda\mathbf{b}) &= \lambda({}_i\mathbf{b}) \\ (\mathbf{A}\lambda)_{|j} &= (\mathbf{A}_{|j})\lambda & {}_i(\lambda\mathbf{A}) &= \lambda({}_i\mathbf{A}) \end{aligned}$$

12 / 37

Questions of the Lecture 1 You should always complete the exercises in the theoretical sections previous to each lecture

(L-1) **QUESTION 1.** Give 3 by 3 examples (not just the zero matrix) of:

- (a) A diagonal matrix: ${}_i\mathbf{A}_{|j} = 0$ if $i \neq j$. (b) A symmetric matrix: $\mathbf{A}_{|j} = {}_j\mathbf{A}$.
 (c) An upper triangular matrix: ${}_i\mathbf{A}_{|j} = 0$ if $i > j$. (d) A skew-symmetric matrix: ${}_i\mathbf{A}_{|j} = -{}_j\mathbf{A}_{|i}$.

(Strang, 1988, exercise 7 from section 1.4.)

12 / 37

1 Highlights of Lesson 2

Highlights of Lesson 2

- Dot product
- linear combinations
- The column picture of the Geometry of linear equations

13 / 37

2 Dot product

$$\mathbf{x} \cdot \mathbf{y} = x_1y_1 + x_2y_2 + x_3y_3 + \cdots + x_ny_n = \sum_{i=1}^n x_iy_i.$$

Symmetric

$$\mathbf{x} \cdot \mathbf{y} = \mathbf{y} \cdot \mathbf{x}$$

Linear in the first argument

$$\begin{aligned} (a\mathbf{x}) \cdot \mathbf{y} &= a(\mathbf{x} \cdot \mathbf{y}) \\ (\mathbf{x} + \mathbf{y}) \cdot \mathbf{z} &= \mathbf{x} \cdot \mathbf{z} + \mathbf{y} \cdot \mathbf{z} \end{aligned}$$

Positive

$$\mathbf{x} \cdot \mathbf{x} \geq 0$$

Definite


$$\mathbf{x} \cdot \mathbf{x} = 0 \Leftrightarrow \mathbf{x} = \mathbf{0}$$

14 / 37

3 Linear combinations

The sum of $x\mathbf{a}$ and $y\mathbf{b}$ is a **linear combination** of \mathbf{a} and \mathbf{b}

$$x\mathbf{a} + y\mathbf{b} = x \begin{pmatrix} 4 \\ 2 \end{pmatrix} + y \begin{pmatrix} -1 \\ 2 \end{pmatrix} = [\mathbf{a}; \mathbf{b};] \begin{pmatrix} x \\ y \end{pmatrix} = \mathbf{MATRIX} \times \mathbf{vector}$$

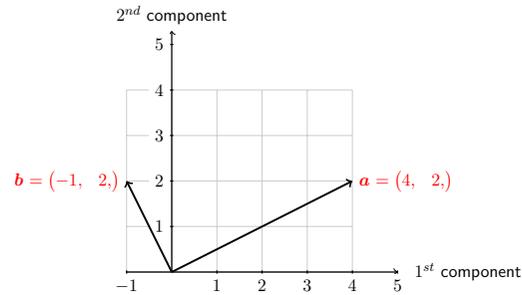


Is $\mathbf{0}$ a linear combination of \mathbf{a} and \mathbf{b} ? What is the picture of **all** linear combinations of \mathbf{a} and \mathbf{b} ?

15 / 37

4 Linear combinations in \mathbb{R}^3

$$\mathbf{a} = (a_1, a_2, a_3) \in \mathbb{R}^3$$

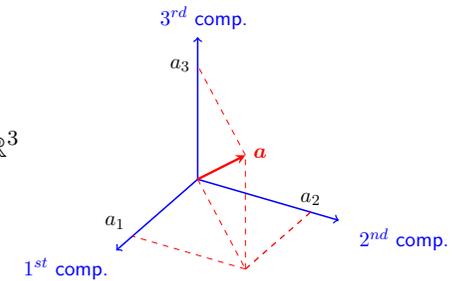

What is the picture of all multiples of \mathbf{a} ?
What is the picture of all linear combinations of two vectors in \mathbb{R}^3 ?
(**linear combination**)

16 / 37

5 Matrix times vector

$$\begin{aligned} \mathbf{A}\mathbf{b} &= b_1\mathbf{A}_{|1} + b_2\mathbf{A}_{|2} + \cdots + b_n\mathbf{A}_{|n} \\ &= b_1 \begin{pmatrix} a_{11} \\ \vdots \\ a_{i1} \\ \vdots \\ a_{m1} \end{pmatrix} + b_2 \begin{pmatrix} a_{12} \\ \vdots \\ a_{i2} \\ \vdots \\ a_{m2} \end{pmatrix} + \cdots + b_n \begin{pmatrix} a_{1n} \\ \vdots \\ a_{in} \\ \vdots \\ a_{mn} \end{pmatrix} = \begin{pmatrix} ({}_1\mathbf{A}) \cdot \mathbf{b} \\ \vdots \\ ({}_i\mathbf{A}) \cdot \mathbf{b} \\ \vdots \\ ({}_n\mathbf{A}) \cdot \mathbf{b} \end{pmatrix} \end{aligned}$$

Hence,

$$\boxed{{}_i(\mathbf{A}\mathbf{b}) = ({}_i\mathbf{A}) \cdot \mathbf{b}}$$

if we omit the period, we can simply write: ${}_i\mathbf{A}\mathbf{b}$

17 / 37

6 Matrix times vector

If $\mathbf{b} \in \mathbb{R}^n$ then $(\mathbf{A}\mathbf{b}) \in \mathbb{R}^m$; where ${}_i(\mathbf{A}\mathbf{b}) = ({}_i\mathbf{A}) \cdot \mathbf{b}$

Matrix times vector

1. $\mathbf{I}\mathbf{a} = \mathbf{a}$
2. $\mathbf{A}(\mathbf{I}_{|j}) = \mathbf{A}_{|j}$
3. $\mathbf{A}(\mathbf{b} + \mathbf{c}) = \mathbf{A}\mathbf{b} + \mathbf{A}\mathbf{c}$
4. $\mathbf{A}(\lambda\mathbf{b}) = \lambda(\mathbf{A}\mathbf{b})$
5. $\mathbf{A}(\lambda\mathbf{b}) = (\lambda\mathbf{A})\mathbf{b}$
6. $\mathbf{A}(\mathbf{B}\mathbf{c}) = [\mathbf{A}(\mathbf{B}_{|1}); \dots; \mathbf{A}(\mathbf{B}_{|n});] \mathbf{c}$
7. $(\mathbf{A} + \mathbf{B})\mathbf{c} = \mathbf{A}\mathbf{c} + \mathbf{B}\mathbf{c}$

Prove the above propositions
(follow the rewriting rules and properties of the dot product)

18 / 37

7 Example of linear system: 2 equations and 2 unknowns

$$\begin{cases} 2x - y = 0 \\ -x + 2y = 3 \end{cases}$$

$$\left[\begin{array}{cc} & \\ & \end{array} \right] \begin{pmatrix} \\ \\ \end{pmatrix} = \begin{pmatrix} \\ \\ \end{pmatrix}$$

$$\mathbf{Ax} = \mathbf{b}$$

$\underbrace{\mathbf{Ax}}_{\text{which linear combination}} = \underbrace{\mathbf{b}}_{\text{equals this vector?}}$

$$x(\mathbf{A}_{|1}) + y(\mathbf{A}_{|2}) = \mathbf{b}$$

19 / 37

8 Geometry of linear systems: Linear combination of columns

$$\begin{cases} 2x - y = 0 \\ -x + 2y = 3 \end{cases}$$


$$x \begin{pmatrix} \\ \\ \end{pmatrix} + y \begin{pmatrix} \\ \\ \end{pmatrix} = \begin{pmatrix} \\ \\ \end{pmatrix}$$

20 / 37

9 2 equations and 2 unknowns: Column picture

$$x \begin{pmatrix} 2 \\ -1 \end{pmatrix} + y \begin{pmatrix} -1 \\ 2 \end{pmatrix} = \begin{pmatrix} 0 \\ 3 \end{pmatrix}$$

Which linear combination of $\begin{pmatrix} 2 \\ -1 \end{pmatrix}$ and $\begin{pmatrix} -1 \\ 2 \end{pmatrix}$ gives $\begin{pmatrix} 0 \\ 3 \end{pmatrix}$?

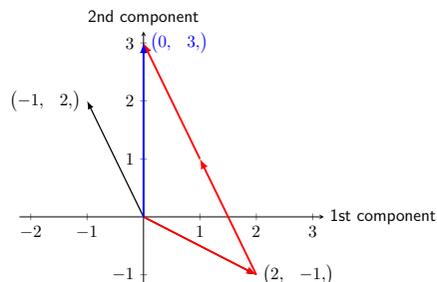

What is the set of all possible combinations?

21 / 37

10 Example: 3 equations and 3 unknowns

$$\begin{cases} 2x - y = 0 \\ -x + 2y - z = -1 \\ -3y + 4z = 4 \end{cases}$$

$$\left[\begin{array}{ccc} & & \\ & & \\ & & \end{array} \right] \begin{pmatrix} \\ \\ \\ \end{pmatrix} = \begin{pmatrix} \\ \\ \\ \end{pmatrix}$$

$$\mathbf{Ax} = \mathbf{b}$$


$\underbrace{\mathbf{Ax}}_{\text{which linear combination}} = \underbrace{\mathbf{b}}_{\text{equals this vector?}}$

22 / 37

11 3 equations and 3 unknowns: Column picture

$$x \begin{pmatrix} 2 \\ -1 \\ 0 \end{pmatrix} + y \begin{pmatrix} -1 \\ 2 \\ -3 \end{pmatrix} + z \begin{pmatrix} 0 \\ -1 \\ 4 \end{pmatrix} = \begin{pmatrix} 0 \\ -1 \\ 4 \end{pmatrix}$$

Which **linear combination** of the columns gives ***b***?

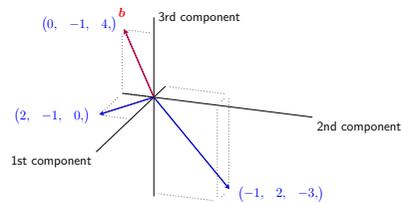

$$\left\{ x = \quad ; y = \quad ; z = \quad \right\}$$


What happens with a different ***b***?... let's see

23 / 37

12 3 equations and 3 unknowns: Column picture

$$x \begin{pmatrix} 2 \\ -1 \\ 0 \end{pmatrix} + y \begin{pmatrix} -1 \\ 2 \\ -3 \end{pmatrix} + z \begin{pmatrix} 0 \\ -1 \\ 4 \end{pmatrix} = \begin{pmatrix} 1 \\ 1 \\ -3 \end{pmatrix}$$

Which **linear combination** of the columns gives this new ***b***?

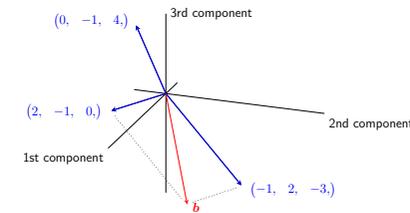

$$\left\{ x = \quad ; y = \quad ; z = \quad \right\}$$

24 / 37

13 What does $Ax=b$ mean?

Ax is a **linear combination** of columns of ***A***:

Example

$$\begin{bmatrix} 2 & 5 \\ 1 & 3 \end{bmatrix} \begin{pmatrix} 1 \\ 2 \end{pmatrix} = 1 \begin{pmatrix} 2 \\ 1 \end{pmatrix} + 2 \begin{pmatrix} 5 \\ 3 \end{pmatrix} = \begin{pmatrix} 12 \\ 7 \end{pmatrix}$$

“ $Ax = b$ ” is asking for a particular linear combination:

$$\begin{bmatrix} 2 & 5 \\ 1 & 3 \end{bmatrix} \begin{pmatrix} \quad \\ \quad \end{pmatrix} = \begin{pmatrix} 12 \\ 7 \end{pmatrix}$$

To solve linear systems we will first learn to transform coefficient matrices by elimination (next lectures)

25 / 37

Questions of the Lecture 2

You must complete the exercises from the corresponding sections of the book

(L-2) QUESTION 1. Working a column at a time, compute the following products

(a)

$$\begin{bmatrix} 4 & 1 \\ 4 & 1 \\ 6 & 1 \end{bmatrix} \begin{pmatrix} 1 \\ 3 \end{pmatrix}$$

(b)

$$\begin{bmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \\ 7 & 8 & 9 \end{bmatrix} \begin{pmatrix} 0 \\ 1 \\ 0 \end{pmatrix}$$

(c)

$$\begin{bmatrix} 4 & 3 \\ 6 & 6 \\ 8 & 9 \end{bmatrix} \begin{pmatrix} 1/2 \\ 1/3 \end{pmatrix}$$

(Strang, 1988, exercise 2 from section 1.4.)

25 / 37

(L-2) QUESTION 2. Can the three equations be solved simultaneously?

$$\begin{aligned}x + 2y &= 2 \\x - y &= 2 \\y &= 1.\end{aligned}$$

What happens if all right hand sides are zero? Is there any non-zero choice of right hand sides which allows the three equations to have a solution? How many non-zero choices have we?

(Strang, 1988, exercise 4 from section 1.2.)

(L-2) QUESTION 3. Compute the product \mathbf{Ax} with

$$\mathbf{A} = \begin{bmatrix} 3 & -6 & 0 \\ 0 & 2 & -2 \\ 1 & -1 & -1 \end{bmatrix} \quad \text{and} \quad \mathbf{x} = \begin{pmatrix} 2 \\ 1 \\ 1 \end{pmatrix}. \quad \text{For this matrix } \mathbf{A}, \text{ find a solution vector}$$

\mathbf{x} to the system $\mathbf{Ax} = \mathbf{0}$, with zeros on the right side of all three equations. Can you find more than one solution?

(Strang, 1988, exercise 5 from section 1.4.)

(L-2) QUESTION 4. Suppose $\mathbf{Ax} = \mathbf{b}$ has two solutions \mathbf{v} and \mathbf{w} (with $\mathbf{b} \neq \mathbf{0}$). Then show that $\frac{1}{2}(\mathbf{v} + \mathbf{w})$ is also a solution, although $\mathbf{v} + \mathbf{w}$ is not.

Hint

Use the following properties: $\mathbf{A}(\mathbf{b} + \mathbf{c}) = \mathbf{Ab} + \mathbf{Ac}$ and $\mathbf{A}(c\mathbf{b}) = c(\mathbf{Ab})$.

(L-2) QUESTION 5. "It is impossible for a system of linear equations to have exactly two solutions". Explain why (answering the next question):

(a) If \mathbf{v} y \mathbf{w} are two solutions, what is another one?

(Strang, 2003, exercise 19 from section 2.2.)

(L-2) QUESTION 6. Draw $\mathbf{v} = \begin{pmatrix} 2 \\ 1 \end{pmatrix}$ and $\mathbf{w} = \begin{pmatrix} 1 \\ 3 \end{pmatrix}$, along with $\mathbf{v} + \mathbf{w}$, $2\mathbf{v} + \mathbf{w}$, and $\mathbf{v} - \mathbf{w}$ in a plane (first component on the horizontal axis and second component on the vertical axis).

(L-2) QUESTION 7. draw the column picture of the following system with solution $x = 3$ and $y = -1$.

$$\begin{cases} 2x + y = 5 \\ x - 3y = 6 \end{cases}$$

(L-2) QUESTION 8. draw the column picture of the following system.

$$\begin{cases} 2x - y = 3 \\ x + y = 1 \end{cases} ; \quad \left(\text{the solution is : } x = 1 + \frac{1}{3}, \quad y = -\frac{1}{3} \right).$$

No deje de hacer los ejercicios del libro.

1 Highlights of Lesson 3

Highlights of Lesson 3

- Matrix multiplication: $(\mathbf{AB})_{lj} = \mathbf{A}(\mathbf{B}_{lj})$
 - Properties
- Transpose of a matrix
- \mathbf{Ax} and \mathbf{xA} (linear combinations)
- Other ways to compute the product
- Transpose of \mathbf{AB}

2 Matrix multiplication (by columns)

Column j of (\mathbf{A} times \mathbf{B}) is:

$$(\mathbf{AB})_{|j} = \mathbf{A}(\mathbf{B}_{|j}) \rightarrow \mathbf{AB}_{|j}$$

Each column of \mathbf{AB} is a linear combination of the p columns of \mathbf{A}

Example

$$\begin{bmatrix} 2 & 1 \\ 3 & 8 \\ 4 & 9 \end{bmatrix} \begin{bmatrix} 1 & 6 \\ 1 & 0 \end{bmatrix} = \left[\mathbf{A}(\mathbf{B}_{|1}); \mathbf{A}(\mathbf{B}_{|2}); \right]$$

$$= \left[\begin{bmatrix} 2 & 1 \\ 3 & 8 \\ 4 & 9 \end{bmatrix} \begin{pmatrix} 1 \\ 1 \end{pmatrix}; \begin{bmatrix} 2 & 1 \\ 3 & 8 \\ 4 & 9 \end{bmatrix} \begin{pmatrix} 6 \\ 0 \end{pmatrix}; \right] = \begin{bmatrix} 3 & 12 \\ 11 & 18 \\ 13 & 24 \end{bmatrix}$$

27 / 37

3 Matrix multiplication properties

MATRIX \times MATRIX = MATRIX

1. $\mathbf{A}(\mathbf{BC}) = (\mathbf{AB})\mathbf{C}$ remember $\mathbf{A}(\mathbf{Bc}) = [\mathbf{A}(\mathbf{B}_{|1}); \dots \mathbf{A}(\mathbf{B}_{|n});] \mathbf{c}$
2. $(\mathbf{A} + \mathbf{B})\mathbf{C} = \mathbf{AC} + \mathbf{BC}$.
3. $\mathbf{A}(\mathbf{B} + \mathbf{C}) = \mathbf{AB} + \mathbf{AC}$.
4. $\mathbf{A}(\lambda\mathbf{B}) = (\lambda\mathbf{A})\mathbf{B} = \lambda(\mathbf{AB})$.
5. $\mathbf{IA} = \mathbf{A}$.
6. $\mathbf{AI} = \mathbf{A}$.

28 / 37

4 Transposing a matrix

Transpose

$$(\text{column } i \text{ of } \mathbf{A}^T) = (\text{row } i \text{ of } \mathbf{A}) \leftrightarrow (\mathbf{A}^T)_{|i} = {}_i\mathbf{A}$$

$$\mathbf{A} = \begin{bmatrix} 1 & 3 \\ 1 & 3 \\ 4 & 1 \end{bmatrix}; \quad \mathbf{A}^T =$$

$${}_i\mathbf{A}_{|j} = {}_j|\mathbf{A}^T_{|i}; \quad (\mathbf{A}^T)^T = \mathbf{A}; \quad {}_j|\mathbf{A}^T = \mathbf{A}_{|j}$$

Symmetric matrices

$$\mathbf{A}^T = \mathbf{A}$$

$$\begin{bmatrix} 3 & 1 & 7 \\ & 2 & 9 \\ & & 1 \end{bmatrix}$$

29 / 37

5 Vectors, row matrices, column matrices

$$(1, 3, -10) = \begin{pmatrix} 1 \\ 3 \\ -10 \end{pmatrix}; \quad \text{but} \quad [1 \ 3 \ -10] \neq \begin{bmatrix} 1 \\ 3 \\ -10 \end{bmatrix}$$

$$\mathbf{A} = \begin{bmatrix} 1 & 3 \\ 2 & 3 \\ 4 & 1 \end{bmatrix}; \quad {}_2|\mathbf{A} = (2, 3) = \begin{pmatrix} 2 \\ 3 \end{pmatrix}; \quad \mathbf{A}_{|1} = \begin{pmatrix} 1 \\ 2 \\ 4 \end{pmatrix} = (1, 2, 4)$$

When writing vectors between "square brackets" we get a matrix whose columns are those vectors

$$[{}_3|\mathbf{A}; \ {}_1|\mathbf{A};] = \begin{bmatrix} 4 & 1 \\ 1 & 3 \end{bmatrix}; \quad \mathbf{A}^T = [{}_1|\mathbf{A}; \ {}_2|\mathbf{A}; \ {}_3|\mathbf{A};]$$

30 / 37

6 Linear combination of rows and columns

Linear combination of columns

$$\begin{bmatrix} \diamond & \clubsuit \\ \heartsuit & \spadesuit \\ \diamond & \clubsuit \end{bmatrix} \begin{pmatrix} 3 \\ 4 \end{pmatrix} = 3 \begin{pmatrix} \diamond \\ \heartsuit \\ \diamond \end{pmatrix} + 4 \begin{pmatrix} \clubsuit \\ \spadesuit \\ \clubsuit \end{pmatrix}$$

MATRIX \times **vector** = **vector**

Linear combination of rows

$$(1, 2, 7) \begin{bmatrix} \diamond & \clubsuit \\ \heartsuit & \spadesuit \\ \diamond & \clubsuit \end{bmatrix} = 1(\diamond, \clubsuit) + 2(\heartsuit, \spadesuit) + 7(\diamond, \clubsuit)$$

vector \times **MATRIX** = **vector**

Linear combinations

→

$$\mathbf{aB} = (\mathbf{B}^T)\mathbf{a}$$

31 / 37

7 Vector times matrix

Remember that ${}_i(\mathbf{Ab}) = ({}_i\mathbf{A}) \cdot \mathbf{b}$; hence

$$(\mathbf{aB})_{|j} = {}_j(\mathbf{aB}) = {}_j((\mathbf{B}^T)\mathbf{a}) = ({}_j(\mathbf{B}^T)) \cdot \mathbf{a} = (\mathbf{B}_{|j}) \cdot \mathbf{a} = \mathbf{a} \cdot (\mathbf{B}_{|j})$$

Rewriting rules

$${}_i(\mathbf{Ab}) = ({}_i\mathbf{A}) \cdot \mathbf{b}$$

and

$$(\mathbf{aB})_{|j} = \mathbf{a} \cdot (\mathbf{B}_{|j})$$

Thus, if we omit the period, we can simply write:

$${}_i\mathbf{Ab} \quad \text{and} \quad \mathbf{aB}_{|j}$$

32 / 37

8 Matrix multiplication: rows times columns

Consider \mathbf{A} and \mathbf{B} , then:

$$\begin{matrix} m \times p & p \times n \end{matrix}$$

$${}_i(\mathbf{AB})_{|j} = ({}_i\mathbf{A}) \cdot (\mathbf{B}_{|j})$$

Proof.

Remember that ${}_i(\mathbf{Ab}) = ({}_i\mathbf{A}) \cdot \mathbf{b}$, hence

$${}_i(\mathbf{AB})_{|j} = {}_i((\mathbf{AB})_{|j}) = {}_i(\mathbf{A}(\mathbf{B}_{|j})) = ({}_i\mathbf{A}) \cdot (\mathbf{B}_{|j})$$

□

Thus, if we omit the period, we can simply write:

$${}_i\mathbf{AB}_{|j}$$

33 / 37

9 Matrix multiplication (by rows)

Consider \mathbf{A} and \mathbf{B} , then:

$$\begin{matrix} m \times p & p \times n \end{matrix}$$

$${}_i(\mathbf{AB}) = ({}_i\mathbf{A})\mathbf{B}$$

Proof.

Let's see the j th components are equal:

$$({}_i(\mathbf{AB}))_{|j} = {}_i((\mathbf{AB})_{|j}) = ({}_i\mathbf{A}) \cdot (\mathbf{B}_{|j}) = (({}_i\mathbf{A})\mathbf{B})_{|j}$$

so ${}_i(\mathbf{AB}) = ({}_i\mathbf{A})\mathbf{B}$.

□

Thus, we can simply write:

$${}_i\mathbf{AB}$$

34 / 37

10 Matrix multiplication (by rows)

Each row of \mathbf{AB} is a linear combination of the p rows of \mathbf{B}

$$\begin{bmatrix} 2 & 1 \\ 3 & 8 \\ 4 & 9 \end{bmatrix} \begin{bmatrix} 1 & 6 \\ 1 & 0 \end{bmatrix} = \begin{bmatrix} 3 & 12 \\ 11 & 18 \\ 13 & 24 \end{bmatrix} \text{ where } \begin{cases} (2, 1) \begin{bmatrix} 1 & 6 \\ 1 & 0 \end{bmatrix} = (3, 12) \\ (3, 8) \begin{bmatrix} 1 & 6 \\ 1 & 0 \end{bmatrix} = (11, 18) \\ (4, 9) \begin{bmatrix} 1 & 6 \\ 1 & 0 \end{bmatrix} = (13, 24) \end{cases}$$

35 / 37

11 Transposing a product of matrices

Since

- $(\mathbf{A}^T)_{|j} = {}_j|\mathbf{A}$
- $\mathbf{aB} = (\mathbf{B}^T)\mathbf{a}$

it follows that:

$$\boxed{(\mathbf{AB})^T = (\mathbf{B}^T)(\mathbf{A}^T)}$$

Proof.

$$(\mathbf{AB})^T_{|j} = {}_j|\mathbf{AB} = (\mathbf{B}^T)({}_j|\mathbf{A}) = (\mathbf{B}^T)(\mathbf{A}^T)_{|j}.$$

□

Matrix times its transpose is always symmetric

36 / 37

Librería `nal` para Python

Revise la implementación de las operaciones del álgebra matricial en la librería `nal` para Python que acompaña al curso:

Sección 1.3 de la documentación (o estudie directamente el código).

<https://github.com/mbujosab/nacallib>

Verá que el código es una traducción literal de las *definiciones* vistas aquí; pero que **no hay ni una línea de código que describa las propiedades** que hemos demostrado en estas tres lecciones. ¡No es necesario! **Las definiciones implican las propiedades** (como hemos comprobado teóricamente con las demostraciones de estas lecciones). **Verifique con ejemplos que todas las propiedades se cumplen**. Estudie los **notebooks de Jupyter** correspondientes a las tres primeras lecciones.

37 / 37

Questions of the Lecture 3

No deje de hacer los ejercicios del libro.

(L-3) QUESTION 1. Multiply these matrices in the orders \mathbf{EF} , \mathbf{FE} and \mathbf{E}^2

$$\mathbf{E} = \begin{bmatrix} 1 & 0 & 0 \\ a & 1 & 0 \\ b & 0 & 1 \end{bmatrix}; \quad \mathbf{F} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & c & 1 \end{bmatrix}.$$

(Strang, 1988, exercise 34 from section 1.4.)

(L-3) QUESTION 2. True or false; give a specific counterexample when false.

- If the first and third columns of \mathbf{B} are the same, so are the first and third columns of \mathbf{AB} .
- If the first and third rows of \mathbf{B} are the same, so are the first and third rows of \mathbf{AB} .
- If the first and third rows of \mathbf{A} are the same, so are the first and third rows of \mathbf{AB} .
- $(\mathbf{AB})^2 = \mathbf{A}^2\mathbf{B}^2$.

(Strang, 1988, exercise 10 from section 1.4.)

37 / 37

(L-3) QUESTION 3. Consider the vectors

$\mathbf{a} = (1, -2, 7)$ and $\mathbf{b} = (3, 5, 1)$. Compute the following products

(a) $\mathbf{a} \cdot \mathbf{a}$ (b) $\mathbf{a} \cdot \mathbf{b}$ (c) $[\mathbf{a}][\mathbf{b}]^T$

(Strang, 1988, exercise 3 from section 1.4.)

(L-3) QUESTION 4. Write down the 2 by 2 matrices \mathbf{A} and \mathbf{B} that have entries

$a_{ij} = i + j$ and $b_{ij} = (-1)^{i+j}$. Multiply them to find \mathbf{AB} and \mathbf{BA} .

(Strang, 1988, exercise 6 from section 1.4.)

(L-3) QUESTION 5. The product of two lower triangular matrices is again lower triangular (all its entries above the main diagonal are zero). Confirm this with a 3 by 3 example, and then explain how it follows from the laws of matrix multiplication.

(Strang, 1988, exercise 12 from section 1.4.)

(L-3) QUESTION 6. Consider the matrices \mathbf{A} , \mathbf{B} , \mathbf{C} , \mathbf{D} , \mathbf{E} and \mathbf{F} .

$$\mathbf{A} = \begin{bmatrix} 1 & 2 & 3 \\ 0 & 1 & 2 \\ 1 & -1 & 0 \end{bmatrix} \quad \mathbf{B} = \begin{bmatrix} 1 & 2 & -2 \\ 0 & -1 & 4 \end{bmatrix} \quad \mathbf{C} = \begin{bmatrix} 1 & 0 \\ 2 & 1 \\ 3 & -1 \end{bmatrix}$$

$$\mathbf{D} = \begin{bmatrix} 0 & 2 & 1 \\ 2 & 1 & -1 \end{bmatrix} \quad \mathbf{E} = \begin{bmatrix} 2 & 4 \\ 3 & 1 \end{bmatrix} \quad \mathbf{F} = \begin{bmatrix} 1 & 0 \\ 2 & -1 \end{bmatrix}$$

Compute (in particular, note that $\mathbf{EF} \neq \mathbf{FE}$!)

- | | | |
|-------------------------------|--------------------------------|--------------------|
| (a) $\mathbf{B} + \mathbf{D}$ | (b) $2\mathbf{E} - \mathbf{F}$ | (c) \mathbf{AC} |
| (d) \mathbf{BC} | (e) \mathbf{CB} | (f) \mathbf{ACD} |
| (g) \mathbf{EF} | (h) \mathbf{FE} | (i) \mathbf{CEF} |

Strang, G. (1988). *Linear algebra and its applications*. Thomson Learning, Inc., third ed. ISBN 0-15-551005-3.

Strang, G. (2003). *Introduction to Linear Algebra*. Wellesley-Cambridge Press, Wellesley, Massachusetts, USA, third ed. ISBN 0-9614088-9-8.